BROKK 110+

- Increased uptime and power over time
- Smart sensors and operator support system
- Lightweight control box with tilted joysticks
- 19,5 kW Brokk SmartPower+ electrical system
- Full 360° working radius for optimal reach and precision

Whether you are working in confined spaces, navigating stairs, or operating in demanding industrial environments, the **Brokk 110+** delivers outstanding versatility and dependable performance. It fits easily in an elevator, a small truck, or on a car trailer, and with Brokk SmartPower+, it is now smarter, more efficient, and even more reliable.

As a sibling to the more powerful Brokk 130+, the **Brokk 110+** delivers reliable capability in confined spaces and a wide range of everyday demolition applications. From residential renovation to industrial demolition, the **Brokk 110+** continues the legacy of its predecessor with advanced efficiency, improved serviceability, and maximum uptime.

Hydraulic breaker in images: BHB 155
Load and stability diagram available on request

TECHNICAL DATA

Slewing speed	10 sec/360°
Transport speed, max.	2.5 km/h; 1.6 mph
Climbing inclination, max.	30°
Hydraulic system capacity	40 l; 10.6 US gal
Pump type	Variable load-sensing
System pressure	18 MPa; 2611 psi
Pump flow 50 Hz	54 l/min; 14.3 US gal/min
60 Hz	57 l/min; 15 US gal/min
Power technology	Brokk SmartPower+
Electric motor type	ABB
Power*	19,5 kW
Recommended fuse size*	32 A
Minimum fuse size (reduced power)*	16 A
Starting device	Soft start
Control type	Portable
Signal code	Digital
Transfer	Professional radio/Cable
Range, radio	Up to 300 m
Machine weight**	990 kg; 2183 lbs
Recommended attachment weight	180 kg; 397 lbs
Sound power level L_{WA}***	91 dB(A)

*Valid for 400 V/50 Hz and 440 V/60 Hz
**Excluding options and attachment
***Measured according to directive 2000/14/EC, excl. attachment

OPTIONS

- Extra cylinder protection
- Rubber caterpillar tracks
- Steel caterpillar tracks
- Heat-resistant hoses
- Forced draft cooling for machine
- Forced draft cooling for breaker
- Steel pads
- Air flushing for breaker
- Water spray for breaker
- Extra hydraulic function
- Drainage hose
- Counterweight
- Lifting eyes (regular lifting points are standard)
- Extra support roller for rubber caterpillar tracks
- Motion warning
- Load holding valves

SIZE

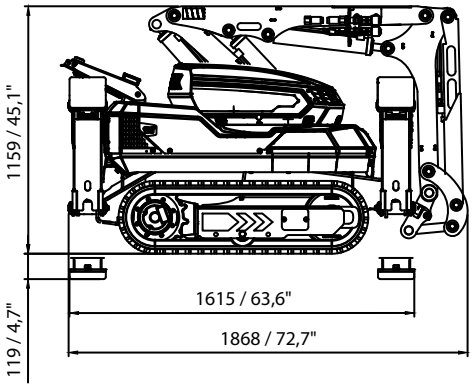

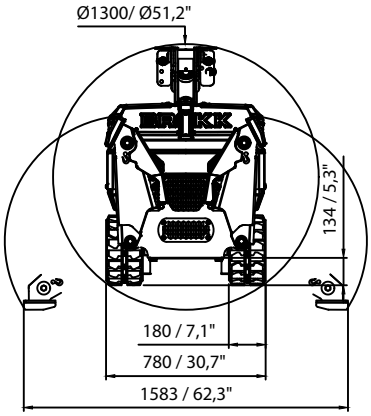

RANGE

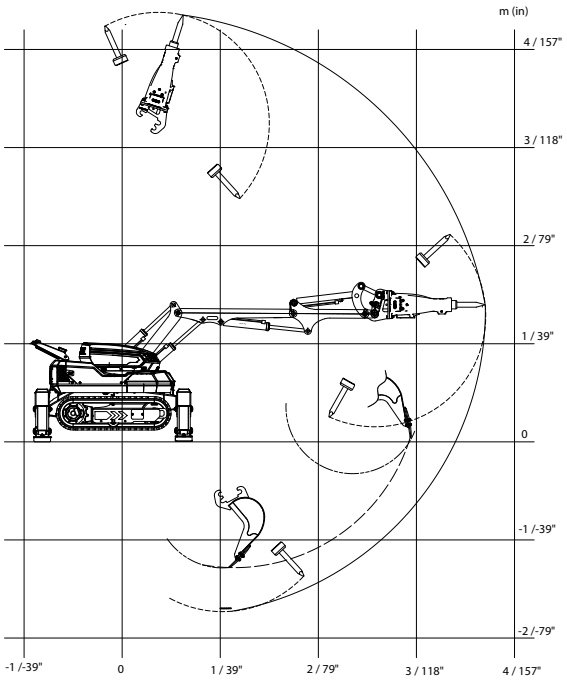

Tolerances for technical data may vary